


# Foundation shuttering system for strip and single foundations

FSL - U Form



The **MSL** type **FSL-U** is comparable with the **FS-U** type in the system employed. The elements have corrugated profiling and are perforated and bent into a U shape ex works. They are made of 0.75 mm thick sheet metal. Element length is approximately 37 cm. The perforated sheet metal with corrugated profiling is identical to the **MSL** material used in joints between walls and for bases. We would be happy to send you test reports on it from the **University of Rostock's** "Institut fuer Baukonstruktion und Bauphysik" on request.

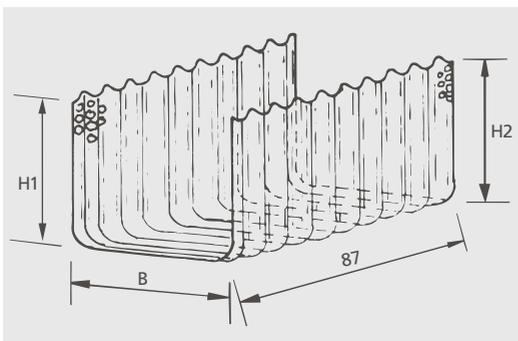

Corners can easily be made by the client by cutting and tying with wire on site. Photos 1, 3 and 4 show a building section with shuttering partially filled with concrete, soil or still freestanding.

Photo 10 shows client foundation insulation. Shuttering support is done as for the **FS-U** type.

